



Quick Installation Guide

RGMC-111GPB

Industrial Card Type Media Converter

Introduction


RGMC-111GPB is industrial rack mount card type Ethernet to fiber media converter for rack-mounted chassis box of RMC-1000, which supports hot-swappable and easy installation. RGMC-111GPB is a cost-effective solution for the conversion between 100/1000Base-T(X) and 100/1000Base-X SFP interface, it allows you to extend communication distance by optical fiber. RGMC-111GPB supports MDI/MDIX auto detection, so you don't need to use crossover wires. Therefore, the RGMC-111GPB is reliable media converter and can satisfy most demand of operating environment.



Features

- > Supports 1 port 100/1000Base-T(X) auto-negotiation and auto-MDI/MDI-X
- > Support Ethernet to SFP port conversion
- > Ethernet port supports full/half duplex operation
- > SFP port support full-duplex operation
- > Provided DIP-Switch for SFP speed setting
- > Hot-swappable, high reliability and easy installation
- > Up to 18 slot high density installation in RMC-1000 chassis on 19 inches rack



Installation

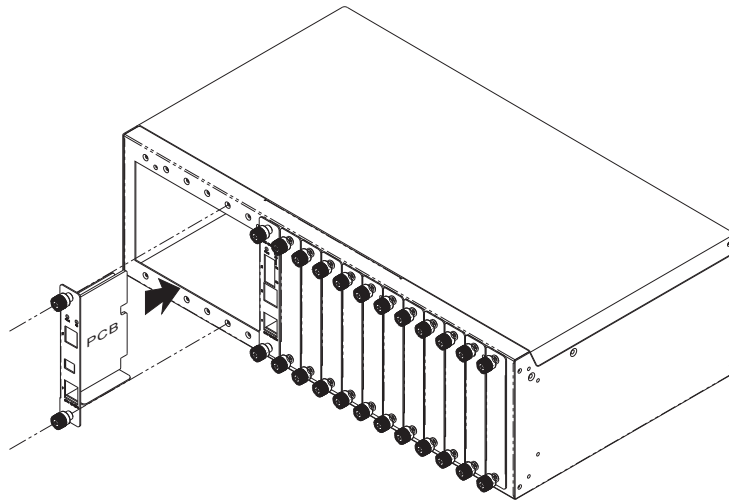

Specifications

ORing Media Converter Model	RGMC-111GPB
Physical Ports	
100/1000 Base-T(X) Ports in RJ45 Auto MDI/MDIX	1
100/1000Base-X SFP port	1
Technology	
Ethernet standards	IEEE 802.3u for 100Base-TX and 100Base-FX IEEE 802.3ab for 1000Base-T IEEE 802.3z for 1000Base-X
DIP-Switch setting	DIP-Switch 1 (ON) and DIP-Switch 2 (ON) : SFP speed setting to 100Mbps DIP-Switch 1 (OFF) and DIP-Switch 2 (OFF) : SFP speed setting to 1000Mbps
LED Indicators	
Power indicator	Green : (ON) power input on-line / (OFF) power input off-line
100/1000Base-T(X) RJ45 port indicator	LED for Link/Act and Speed indicator ~ Green on only : 1000Mbps Link/Act - (ON) Link up / (Flash) Acting / (OFF) Link down Green and Amber on : 100Mbps Link/Act - (ON) Link up / (Flash) Acting / (OFF) Link down * Note : If amber on only : 10Mbps (This is not valid mode)
100/1000Base-X fiber port indicator	Green for fiber port Link/Act - (ON) Link up / (Flash) Acting / (OFF) Link down
Power	
Power consumption(Typ.)	3.6 Watts
Overload current protection	Present
Physical Characteristic	
Dimension (W x D x H)	21.8 (W) x 73.1 (D) x 126 (H)mm (0.86 x 2.88 x 4.96 inch)
Weight (g)	145 g
Environmental	
Storage Temperature	-40 to 85°C (-40 to 185°F)
Operating Temperature	-10 to 60°C (14 to 140°F)
Operating Humidity	5% to 95% Non-condensing
Regulatory Approvals	
EMI	FCC Part 15, CISPR (EN55022) class A
EMS	EN61000-4-2 (ESD), EN61000-4-3 (RS), EN61000-4-4 (EFT), EN61000-4-5 (Surge), EN61000-4-6 (CS), EN61000-4-8, EN61000-4-11
Shock	IEC60068-2-27
Free Fall	IEC60068-2-32
Vibration	IEC60068-2-6
Warranty	2 years

Connections of Media converter

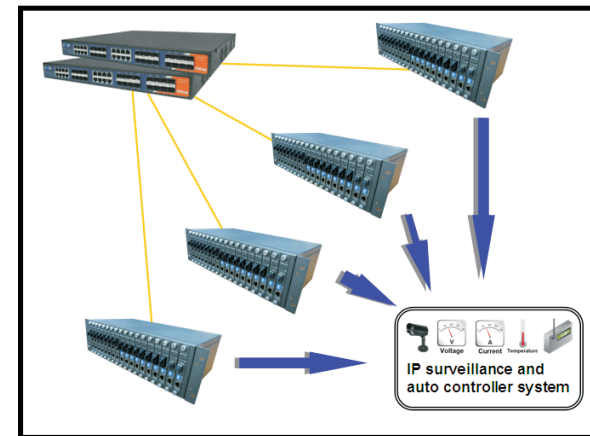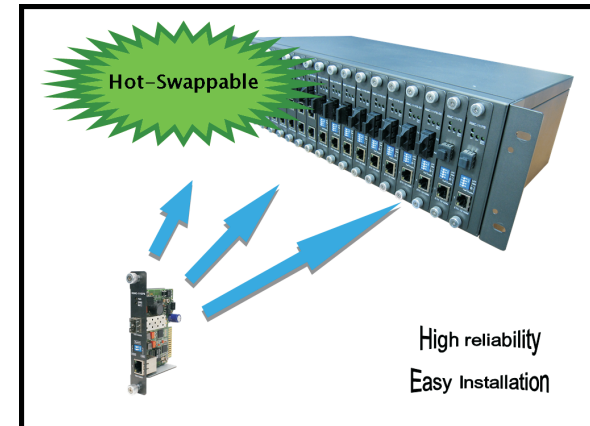

Working Status


Ethernet Port Status	SFP Fiber Port Status	Working status
100Mbps	100Mbps	Valid
100Mbps	1000Mbps	Invalid
1000Mbps	1000Mbps	Valid
1000Mbps	100Mbps	Invalid

Quick Installation Guide

RGMC-111GPB

Industrial Card Type Media Converter

Front Panel

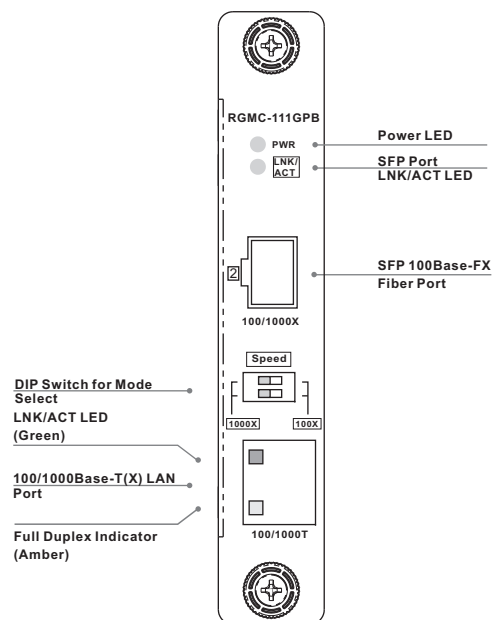

■ DIP Switch Function

DIP-Switch	Description
ALL ON	SFP speed setting to 100Mbps
ALL OFF	SFP speed setting to 1000Mbps

Accessory


① Dust Cover (RJ-45)



② Dust Cover (SFP)



③ QIG



Communication Connections

● 1000Base-T Ethernet Connection

■ RJ45 (8-pin, MDI) Port Pinouts

Pin	MDI
1	BI_DA+
2	BI_DA-
3	BI_DB+
4	BI_DB-
5	BI_DC+
6	BI_DC-
7	BI_DD+
8	BI_DD-

■ RJ45 (8-pin, MDI-X) Port Pinouts

Pin	MDI-X
1	BI_DB+
2	BI_DB-
3	BI_DA+
4	BI_DD+
5	BI_DD-
6	BI_DA-
7	BI_DC+
8	BI_DC-

● 100Base-TX Ethernet Port Connection


■ RJ45 (8-pin, MDI) Port Pinouts

Pin	Single
1	Tx+
2	Tx-
3	Rx+
6	Rx-


■ RJ45 (8-pin, MDI-X) Port Pinouts

Pin	Single
1	Rx+
2	Rx-
3	Tx+
6	Tx-


■ RJ45 (8-pin) to RJ45 (8-Pin) Straight-Through Cable Wiring

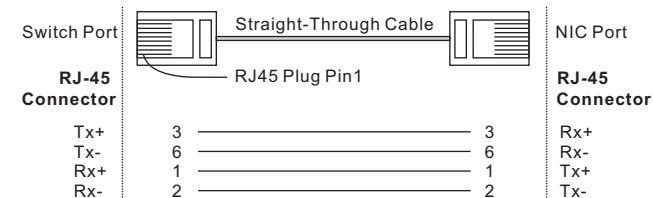

■ RJ45 (8-pin) to RJ45 (8-Pin) Cross-Over Cable Wiring

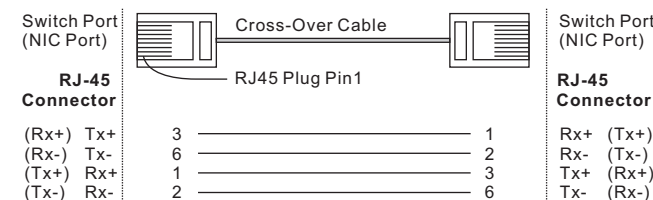

● 100/1000Base-X SFP Port Connection

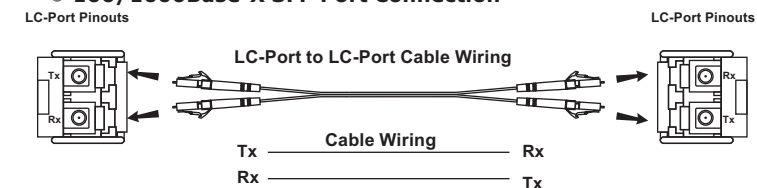

Packing list

Model name	Model Description	Accessory
RGMC-111GPB	Industrial Rack mount card type Ethernet to fiber media converter with 1x100/1000Base-T(X) and 1x100/1000Base-X SFP socket	① X 1, ② X 1, ③ X 1



Copyright© 2012 ORing
All rights reserved.



TEL: +886-2-2218-1066 Website: www.oring-networking.com
FAX: +886-2-2218-1014 E-mail: support@oring-networking.com