



Industrial PC

Spectra PowerBox 4000 1213

Compact 3U Industrial PC with 12th/13th Generation CPU
for Machine Vision / AI Applications

Features

- Compact 3U Industrial PC
- 600 Watt AC Industrial Power Supply (DC Version optional)
- Industrial Mainboard with 1x PCIe 5.0 (x16) and 2x PCIe (x4) Expansion Slots
- Intel® Core™ i5/i7 Processors of the 12th and 13th Generation (long term availability)
- Intel® UHD-Graphics 770 onboard
- 2 x Intel 2.5 Gigabit-LAN onboard
- Interfaces: 1 x VGA, 1x DVI, 2x DP, 1x HDMI,
2 x RJ45, 2 x USB3.2 Gen2, 2 x USB3.2 Gen1 (Front)



Spectra PowerBox 4000 1213

Technical Data

Basic Device Properties

System

Industrial Mainboard	for 24h/7d Operation, long-term available
CPU Socket	LGA1700 for 12th/13th Generation Intel® Core i3/i5/i7/i9 Alder / Raptor Lake up to 125 Watt
Chipset	Intel® R680
Memory Socket	<ul style="list-style-type: none"> 4 x 288-Pin DDR5-DIMM max. 128 GB PC4400 (ECC or Non-ECC)

Controllers

Graphics	Intel® UHD-Grafik 770
Network	2 x Intel i225LM 2.5 GbE
Audio	-

Expansion Slots

PCI-Express	<ul style="list-style-type: none"> 1 x PCIe (x16) 5.0 2 x PCIe(x4) 4.0 for each, one expansion card
-------------	---

Drives

Connectors	<ul style="list-style-type: none"> 4 x SATA-6G-Ports (AHCI, RAID 0/1/5/10) 1 x M.2-Socket (M-Key, 2280, Gen5 PCIe(x4))
------------	--

Interfaces

Front	<ul style="list-style-type: none"> 2 x USB3.2 Gen1 (5 Gbps)
Rear	<ul style="list-style-type: none"> 1 x VGA, 1 x DVI, 2 x DP, 1 x HDMI 2 x RJ45 2 x USB3.2 Gen2 (10 Gbps)
Internal (not activated)	<ul style="list-style-type: none"> 2 x USB3.2 Gen2 (10 Gbps) 2 x USB2.0 (480 Mbps) 2 x RS-232 2 x RS-422/485 1 x TPM Header

Mechanical & Environment Conditions

Chassis	<ul style="list-style-type: none"> Compact 3U Chassis Suitable for up to 3 PCIe Cards Removable Tray for 2 x 2.5" HDD/SSD 1 x 120, 1x 80 und 2 x 60 mm Chassis fans Front-Panel: 1 x Power, 1 x Reset, 2 x USB LED-Display: 0,96" OLED for Status Monitoring Color: Black
Power Supply	<ul style="list-style-type: none"> 600 Watt Industrial Power Supply, 80plus Gold 1 x 40 mm Fan MTBF: >100.000 h @ 25° C
Dimensions (WxHxD)	340 x 133 x 330 mm
Weight	approx. 9 kg
Temperatures	<ul style="list-style-type: none"> Operating temperature: 0°C to +50°C Rel. Humidity: 5% to 90%, non condensing
Mounting	<ul style="list-style-type: none"> In packing list: Brackets for Wall- / Rack- / Table- / Under-table Mounting Optional: 19"-Rack Mounting Bracket (Art.Nr. 157718)
Warranty	24 months
Certificates	CE, EN 62368-1, EN 61000-6-2

Spectra PowerBox 4000 1213

Systems Configurations

Pre-defined Systems

Model	Spectra PowerBox 4000 i5-12500TE	Spectra PowerBox 4000 i7-12700E
Article n°	171102-16-256G-W10	171102-32-1T-W10
Processor	Intel® Core™ i5-12500TE	Intel® Core™ i7-12700E
RAM	16 GB DDR5	32 GB DDR5
SSD	256 GB M.2 NVMe	1 TB M.2 NVMe
Operating System	Microsoft® Windows® 10 IoT Enterprise 2021 LTSC, 64-bit, German / English	
Operating Temperature	0°C ~ +50°C	0°C ~ +50°C

System Configuration Options

Processor

- Intel Core i5-12500TE (35 Watt, 6 Performance Cores @ 1,9 GHz + 0 Efficiency Cores)
 - Intel Core i5-13500TE (35 Watt, 6 Performance Cores @ 1,3 GHz + 8 Efficiency Cores)
 - Intel Core i7-12700E (65 Watt, 8 Performance Cores @ 2,1 GHz + 4 Efficiency Cores)
 - Intel Core i7-13700E (65 Watt, 8 Performance Cores @ 1,9GHz + 8 Efficiency Cores)
- (Processors with up to 125W upon request)

Memory

- 16 / 32 / 64 / 128 GB DDR5 RAM (ECC optional)

Drives

- 256GB / 512GB / 1TB / 2TB NVME M.2 SSD as System Drive
- Up to 4x 2.5" SATA SSD/HDD as Data Drive (RAID1 & Removable Tray optional)

Operating systems (incl. USB-Recovery-Stick and Acronis True Image)

- Windows 10 IoT Enterprise
- Windows 11 Pro
- Windows 2022 Server (64 Bit)
- [Linux Versions](#)

Ask us!




 +49 (0) 7121 1432-150

 +43 (0) 7240 20190

 +41 (0) 43 27710-50

Spectra PowerBox 4000 1213

Details

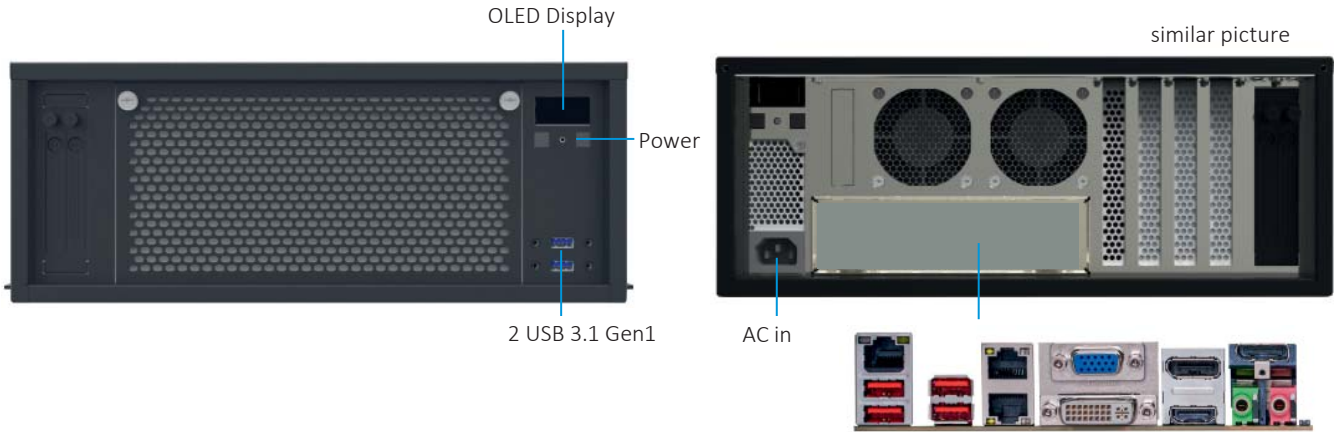

OLED Display



Mounting Possibilities



Wall-, Rack-, Table-, Under-table Mounting
with Brackets included in packing list



Table mounting



Under-table mounting



19" Rack Mounting with optional 19" Brackets



Rack mounting (front)

All brand, company and product names are registered or otherwise protected works of their respective companies / owners. We reserve the right to change specifications and product description at any time without prior notice. (Stand August 2023)