

# MJ20-PRG

Jazz™ Add-on Module Art. No. 112270  
Programming Port

## MJ20-PRG Technical Specifications

### Power supply

Power is supplied via pins 1 and 6, located on the RJ11 connector. Active RS232 positive voltage signals ensure proper communications. Connecting the port directly to a power line may damage the port. If a direct connection is unavoidable, use a serial resistor. For example, in the case of 12V, use a 68Ω 1W resistor.

Input voltage range

5-15V (RS232 positive voltage)

### Communication

RS232

1 port

Galvanic isolation

Yes

Baud rate

300, 600, 1200, 2400, 4800, 9600 bps

Input voltage

±18VDC absolute maximum

Cable length

3m maximum (10 feet)

### Environmental

Operating temperature

0° to 50°C (32° to 122°F)


Storage temperature

-20° to 60° C (-4° to 140°F)

Relative Humidity (RH)

10% to 95% (non-condensing)

### Dimensions

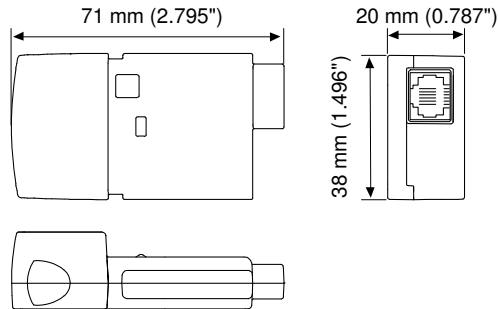


Weight

30g (1.06oz.)

### Pinout

MJ20-PRG RJ11 Connector

Pin #	Description
1	RS232 Power in
2	GND
3	TXD
4	RXD
5	GND
6	RS232 Power in



The information in this document reflects products at the date of printing. Unitronics reserves the right, subject to all applicable laws, at any time, at its sole discretion, and without notice, to discontinue or change the features, designs, materials and other specifications of its products, and to either permanently or temporarily withdraw any of the foregoing from the market.

All information in this document is provided "as is" without warranty of any kind, either expressed or implied, including but not limited to any implied warranties of merchantability, fitness for a particular purpose, or non-infringement. Unitronics assumes no responsibility for errors or omissions in the information presented in this document. In no event shall Unitronics be liable for any special, incidental, indirect or consequential damages of any kind, or any damages whatsoever arising out of or in connection with the use or performance of this information.

The tradenames, trademarks, logos and service marks presented in this document, including their design, are the property of Unitronics (1989) (R'G) Ltd. or other third parties and you are not permitted to use them without the prior written consent of Unitronics or such third party as may own them.

DTS-JAZZ-PRG 10/09