

## CIR-S3SUSPA 1804G

DDR3 SO-DIMM 1866MHz 4GB

Description	Specifications	
<p>The CIR-S3SUSPM1804G is 512M words X 64 bits, 1 rank. Unbuffered Small Outline Dual In-Line Memory Module (SO-DIMM). DDR3 SDRAMs in Fine Ball Grid Array(FBGA) packages on a 204pin glass-epoxy substrate. Provide a high performance 8 byte interface in 67.60mm width form factor of industry standard. It is suitable for easy interchange and addition.</p>	Density	4GB
	Pin Count	204pin
	Type	Unbuffered
	Dimensions	67.6mm x 30.0mm
	ECC	Non-ECC
	Component Config	512M x 8 bit
	Data Rate	1866 MHz
	CAS Latency	13
	Voltage	1.5V / 1.35V
	PCB Layers	8
	Operating Temp.(TCASE)	0°C~+85°C
	Module Ranks	Single Rank

### Features

- Data rate:1866MHz
- 204pin,Small outline dual in-line memory module(SO-DIMM)
- Power supply: VDD= 1.5V (1.425V to 1.575V) & VDD= 1.35V (1.283V to 1.45V)
- Interface: SSTL\_15
- CAS (READ) latency (CL): 6, 7, 8, 9, 10, 11,12,13 support
- POSTED CAS ADDITIVE latency (AL)
- Fully differential clock inputs (CK, /CK) operation
- Differential Data Strobe (DQS, /DQS)
- DM masks write data-in at the both rising and falling edges of the data strobe
- BL switch on the fly
- 8banks
- 8K refresh cycles /64ms
- Dynamic On Die Termination supported
- Asynchronous RESET pin supported
- ZQ calibration supported
- TDQS (Termination Data Strobe) supported (x8 only)
- Write Levelization supported
- Refresh: Auto-Refresh, Self-Refresh
- 8 bit pre-fetch
- Lead-Free Products are RoHS compliant
- TCASE of 0°C to 95°C (Components)
  - 64ms, 8,192 cycle refresh at 0°C to 85°C
  - 32ms at 85°C to 95°C






**Speed Grade**

Frequency Grade	Data Transfer Rate	CAS Latency Support								CL-tRCD-tRP
		CL6	CL7	CL8	CL9	CL10	CL11	CL12	CL13	
DDR3-1866	PC3-14900	800	1066	1066	1333	1333	1600	1600	1866	13-13-13

**Package Dimensions**

Unit: mm

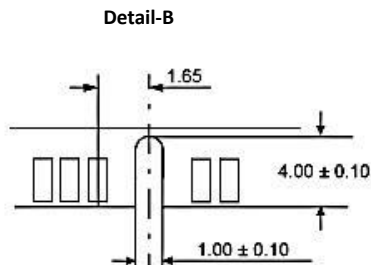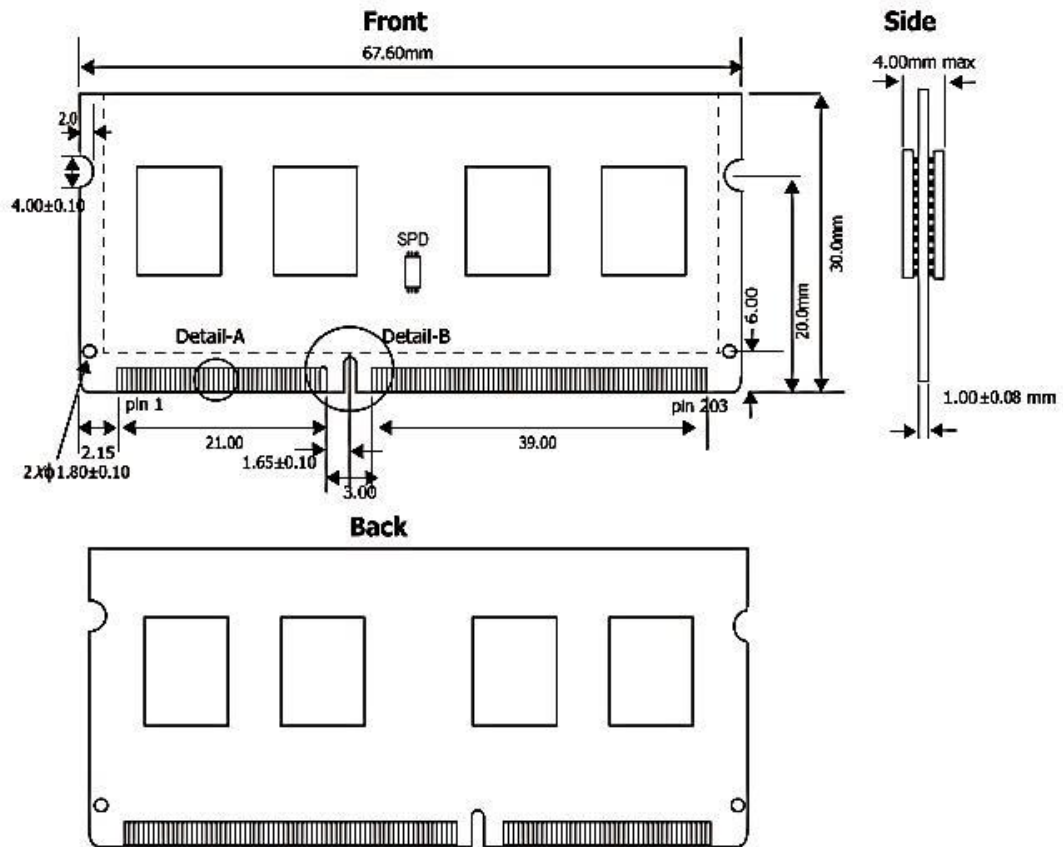

Tolerances : ± 0.15mm unless otherwise specified