


PEAK 888VL2

PICMG 1.3 Full-size SBC with Intel® Q170/H110
Support 6th Generation Intel® Core™ i7/i5/i3 Processors

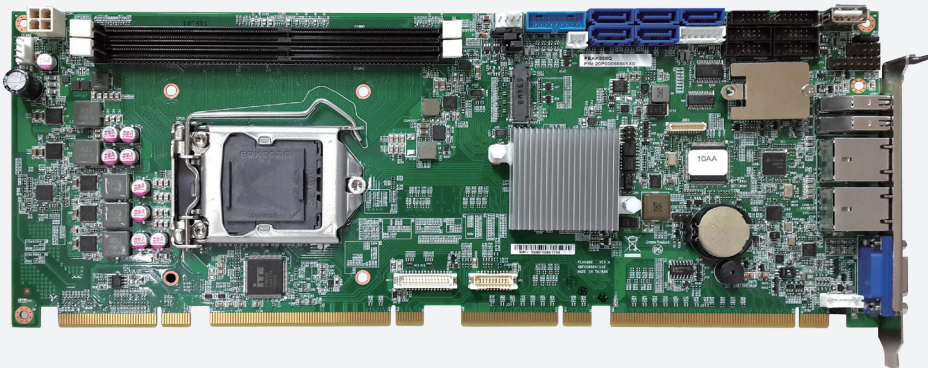

Main Features

- Support 6th generation Intel® Core™ i7/i5/i3 processor
- Support Intel® Q170/ H110 PCH chipset PICMG 1.3 specification
- Support Dual channel DDR4 with Non-ECC DIMMs 1866/2133MHz up to 32GB
- Support PCIe 3.0 SATA 3.0 W/RAID 0,1,5,10, M.2 NVMe
- Support Display for VGA, DVI/HDMI, DP
- Support Intel® AMT 11 & TPM 1.2/ 2.0(optional)

Product Overview

The PEAK 888 is a PICMG1.3 Full-size Single-Board Computing .It equipped with Intel® 6th generation Core™ i7/i5/i3 processors and Intel® Q170/H110 chipset. It comes with Dual DDR4 DIMM socket up to 32GB DDR4 1866/2133MHz with Non-ECC support and integrated HD Graphic controller. The PEAK 888Q SKU with Intel® Q170 PCH providing high performance and rich expansion. The SATA3.0 ports with RAID 0, 1, 5 and 10 helps provide quick access to data files and data protection. Furthermore, the advanced storage capabilities with Intel® RST features PCIe Gen3 x4 on NGFF M.2 form factor (2280, 22110) to maximizes storage performance and it also features an integrated Intel® AMT 11 for easier maintenance.

The PEAK 888H SKU with Intel® H110 PCH provides high performance and cost effective solution.

Specifications

CPU Support

- 6th generation Intel® Core™ i7/i5/i3 processor (65W/ 35W) TDPs, Socket LGA1151

Main Memory

- 2 x DIMM, support Dual channel DDR4 NON-ECC DIMM 1866/2133 MT/S (Maximum32GB)

Platform Control Hub

- Intel® H110 Express Chipset PCH
- Intel® Q170 Express Chipset PCH

BIOS

- AMI system BIOS
- 16MBit SPI depended on AMT function
- Dual BIOS for Four PClex1 and One PClex4

Display

- The Processor Graphics contains a refresh of the ninth generation graphics
- Intel® HD Graphics 530
- Support independent triple display.
- VGA: Resolution up to 1920*1200 pixels @60MHz
- DVI : Resolution up to 1920*1200 pixels @60MHz
- HDMI: Resolution up to 4096*2304 pixels @60MHz
- DP: Resolution up to 4096*2304 pixels @60MHz
- * Supporting 4K display required two DDR channels of same size

Audio

- High definition audio interface (Compatible with NEXCOM audio daughter board PN: 10E000HDA00X0 EBK-HAD)

On-board LAN

- 1 x Intel® WG1219LM GbE PHY (PEAK 888Q support Intel® AMT 11)
- 1 x Intel® I211 Gigabit Ethernet Controller
- RJ45 with LED connector x 2
- Support Boot from LAN (PXE)
- Support Wake on LAN

I/O Interface

- 1 x PCI Express x16 and 1 PCI Express x4 to backplane
- 4 x PCI to backplane
- SATA port


PEAK 888VL2-H

- 3 x SATA 3.0 Port (2 x SATA 3.0 to BP through BIOS setting)
- 1 x M.2 2280 /22110 M Key (SATA 3.0)

PEAK 888VL2-Q

- 5 x SATA 3.0 port (2 x SATA 3.0 to BP through BIOS setting)
- 1 x M.2 2280/ 22110 M Key (NVMe Gen 3 PClex4)
- Support RAID 0/1/5/10
- SIO: ITE8786 , COM 1,3,4 Support RS232 , COM2 support RS232/422/485 can be selected RI/5V/12V through jumper
- PS2 KB/MS *1 JST connector

Block Diagram

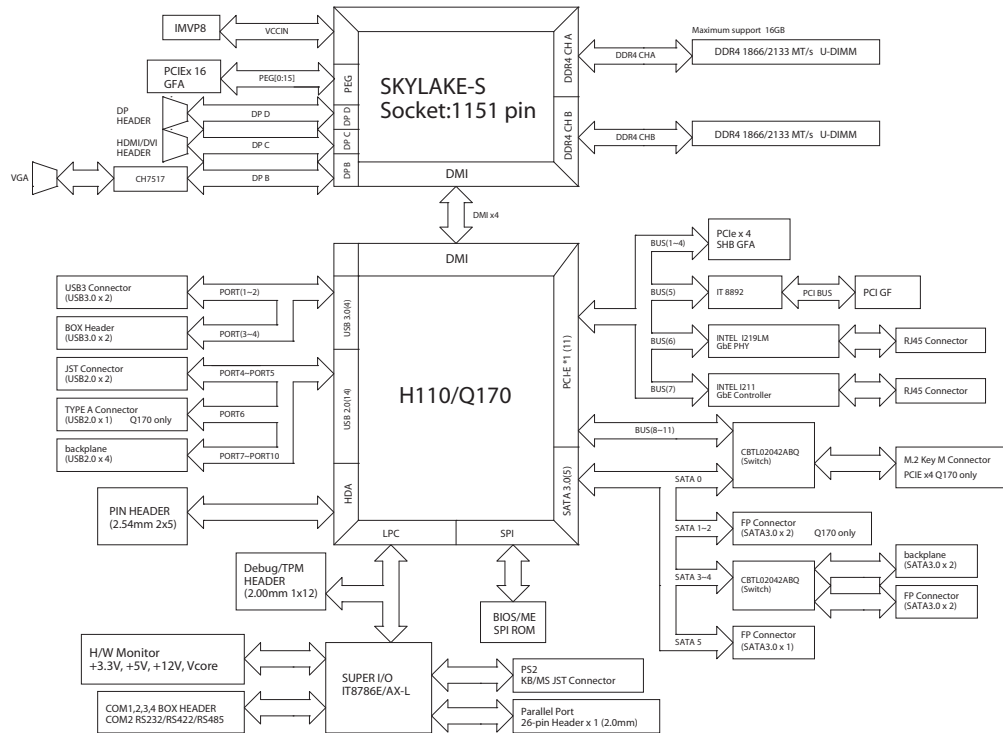

- Parallel Port: 26-pin box header x 1
- 6 Ports USB2.0 and 4 ports USB3.0
 - 2 ports USB2.0, 2 ports USB3.0
 - 1 port USB2.0 Type A (PEAK 888Q only)
 - 4 ports USB 2.0 through backplane
 - 2 ports USB 3.0 through I/O bracket
- 2*10 pin header to support TPM module
- 2 x Smart FAN connector (for CPU, system)
- On-board buzzer
- Watchdog time out can be programmable by software from 1 second to 255 seconds

Power Requirements

- Power source from backplane through golden finger and AUX +12V
- Support ATX/AT function by jumper setting
- BIOS default is (ATX MODE)

Dimensions

- 338.58mm x 126.39mm, 8 layers (single side)

Environment

- Board level operating temperatures: -20°C to 60°C
- Storage temperatures: -20°C to 85°C
- Relative humidity:
 - 0% to 90% (operating, non-condensing)
 - 0% to 95% (non-operating, non-condensing)

Certifications

- CE approval
- FCC Class A
- CB/CCC certification

Ordering Information

◆ D95 ? , , , J @ & ! " " " 5 fh!Bf! . % / + % & \$

PICMG 1.3 Full-size SBC,Q170, Intel® LGA1151 , DDR4 DIMM, VGA x1, LAN x2, USB3.0 x4, SATA3.0 x5

◆ D95 ? , , , J @ & ! < " " " 5 fh!Bf! . % / + % & %

PICMG 1.3 Full-size SBC,H110, Intel® LGA1151,DDR4 DIMM, VGA x1, LAN x2, USB3.0 x4, SATA3.0 x4