CAN-2057C Quick Start

v1.30, Dec 2021

Packing List

In addition to this guide, the package includes the following items:

CAN-2057C

Screw Driver

Quick Start

Technical Support

service@icpdas.com

www.icpdas.com

Resources

How to search for drivers, manuals and spec information on ICP DAS website.

- For Mobile Web

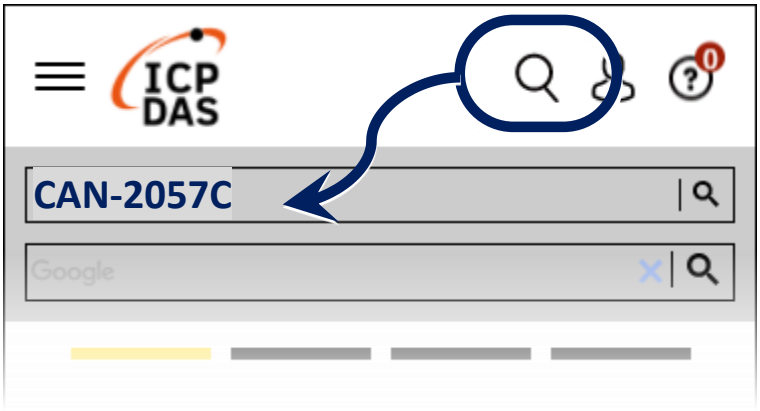

- For Desktop Web

1 Node ID, baud rate and terminal resistance

According to the user's requirements for CANopen network, set the node ID and CAN baud rate of this module on the CANopen network. If the module is located at the terminal of the network, according to the standard CANopen network specification, this module must enable the terminal resistance.

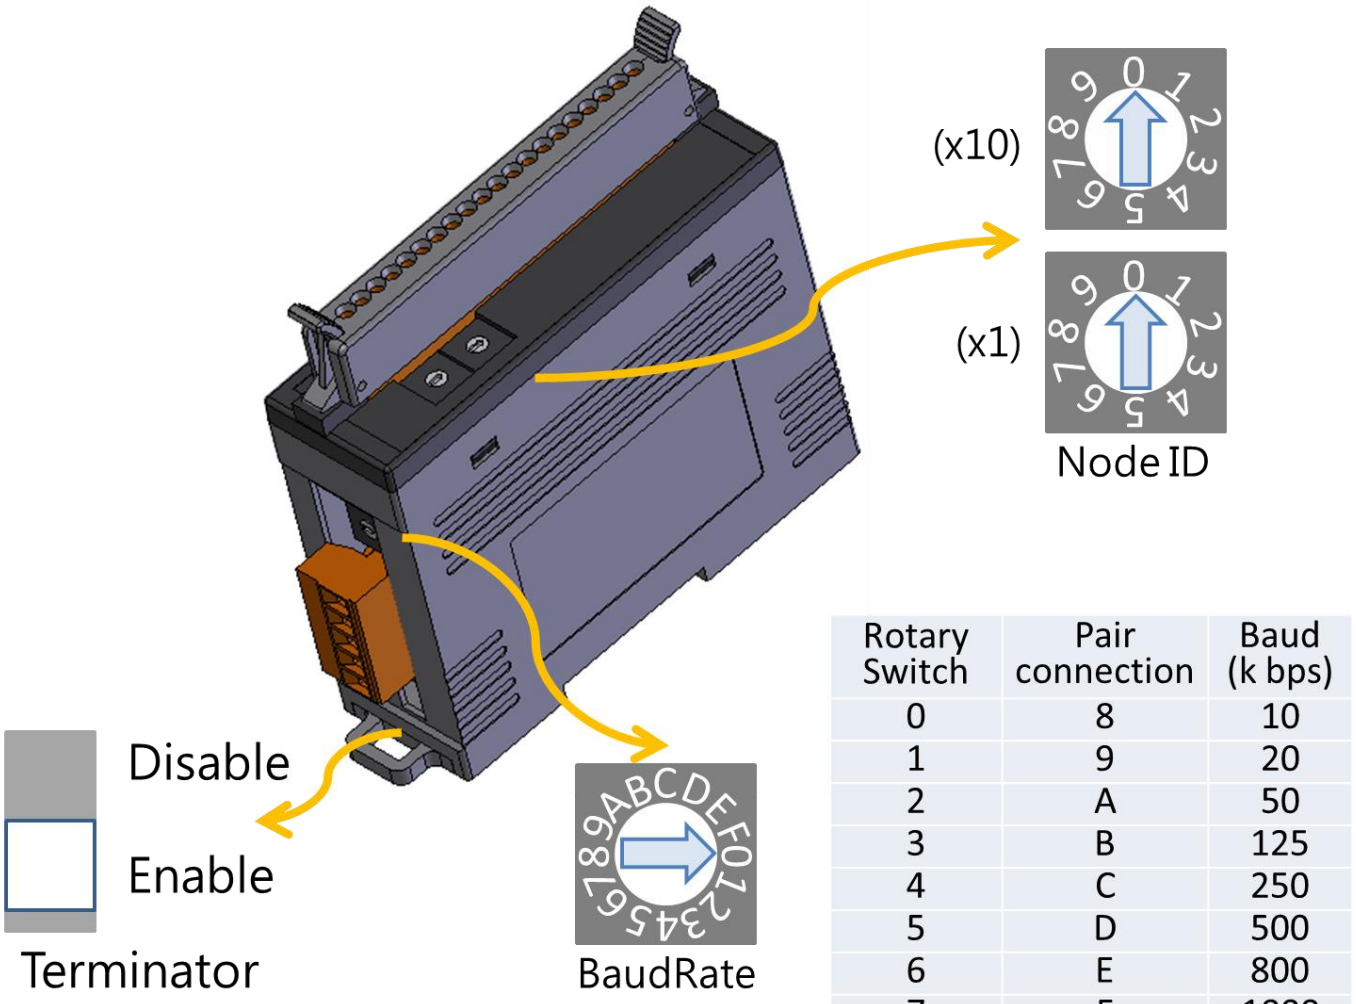

Rotary Switch	Pair connection	Baud (k bps)
0	8	10
1	9	20
2	A	50
3	B	125
4	C	250
5	D	500
6	E	800
7	F	1000

2 I/O channel connection

Module Name	CAN-2057C	
Output Type	ON State LED ON Readback as 1	OFF State LED OFF Readback as 0
Drive Relay	Relay Off	Relay On
	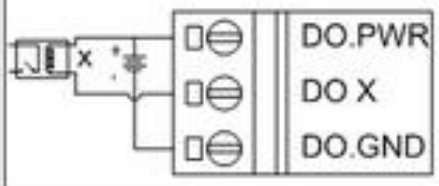	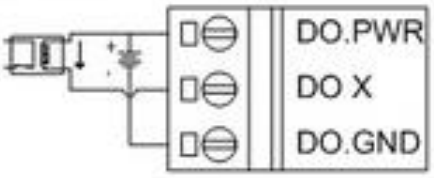
Resistance Load	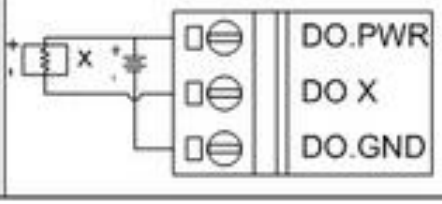	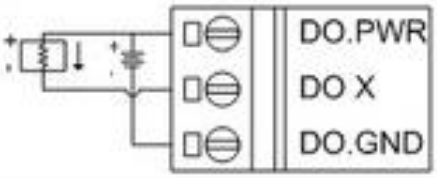

3 CAN port connection

2-wire Connection

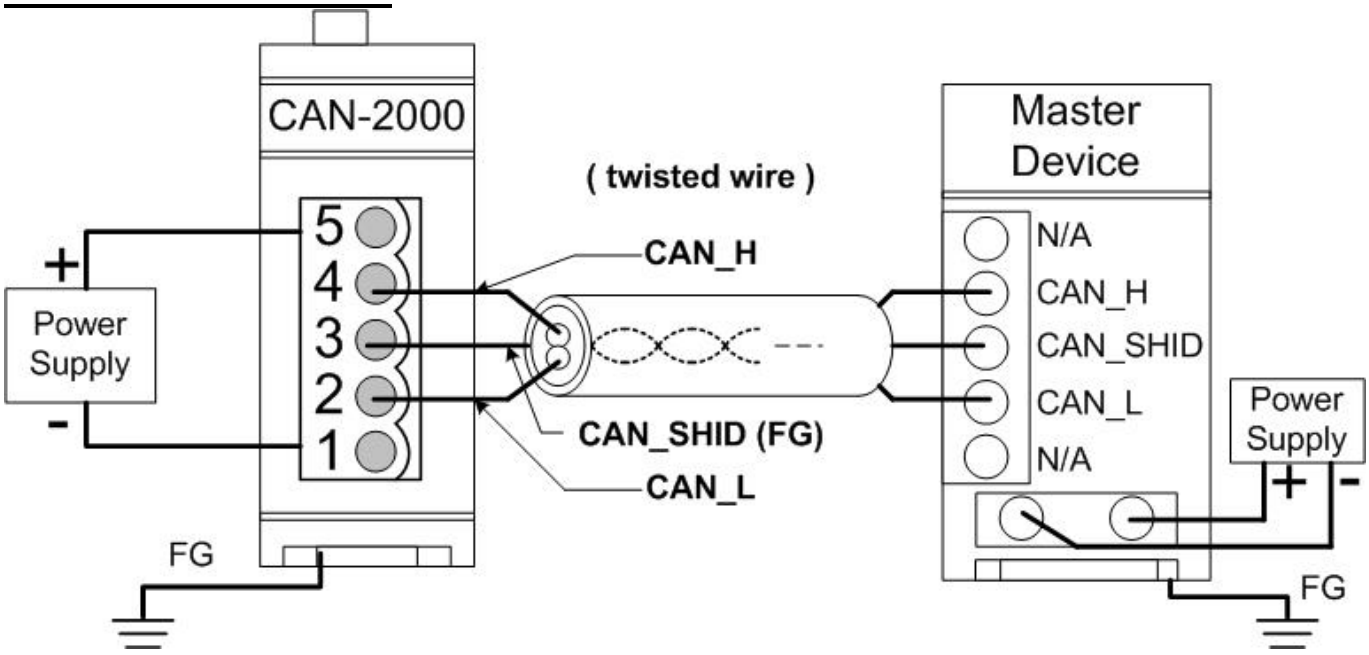

3-wire Connection

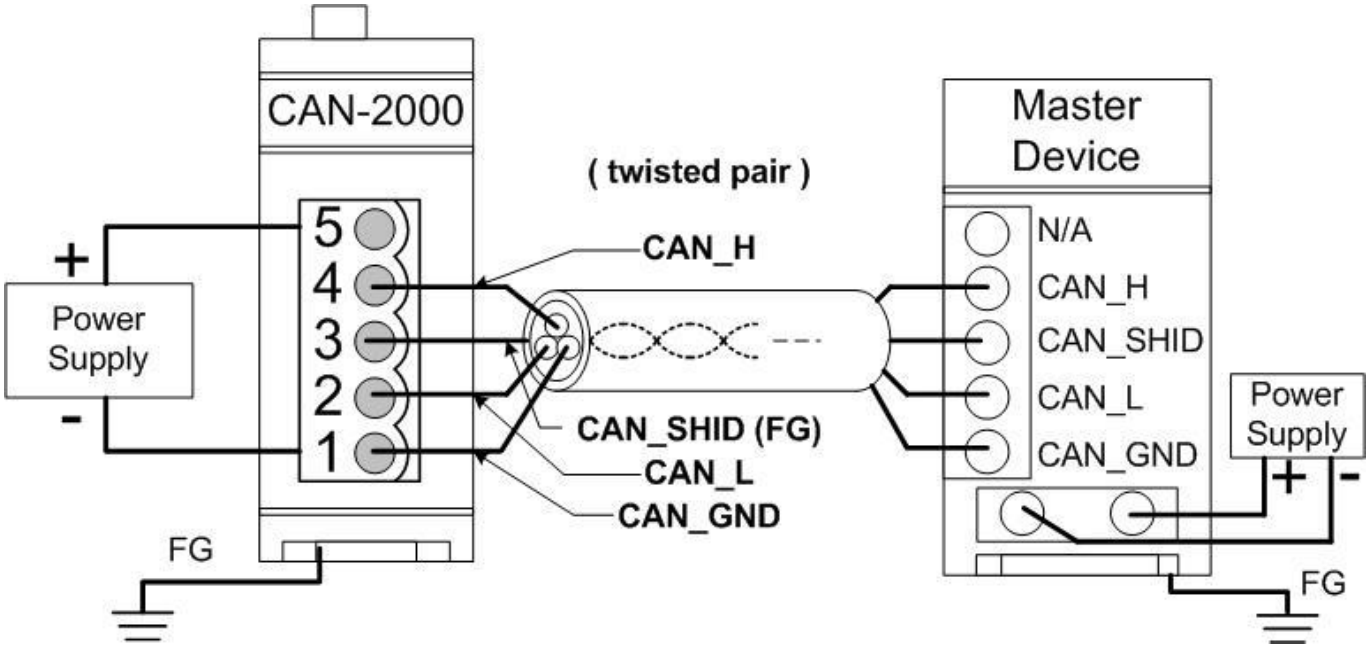
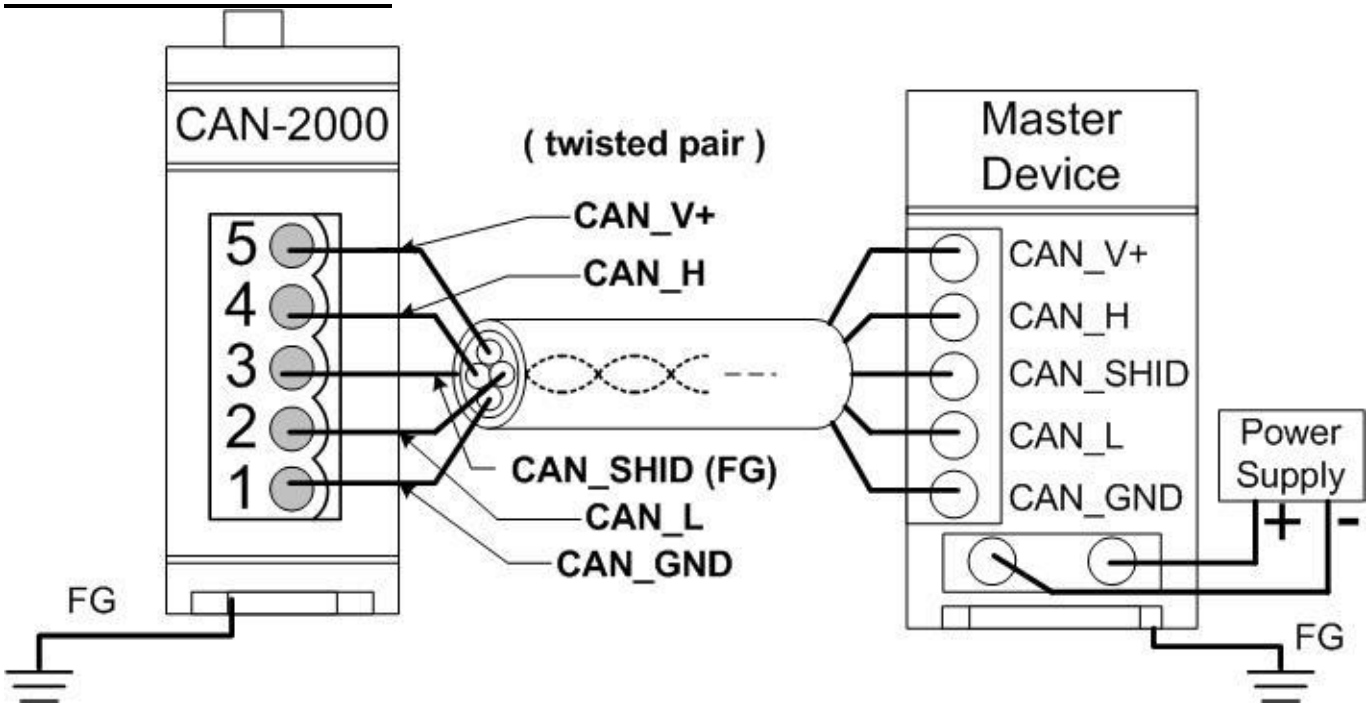
4-wire Connection