



PCIE-Q170

Full-size PICMG 1.3 CPU Card supports LGA1151 Intel® Core™ i7/i5/i3/Pentium®/Celeron® CPU per Intel® Q170, DDR4, VGA/IDP, Dual Intel® PCIe GbE, USB 3.0, SATA 6Gb/s, PCIe mini, mSATA, HD Audio, Intel® AMT, iRIS-2400 and RoHS

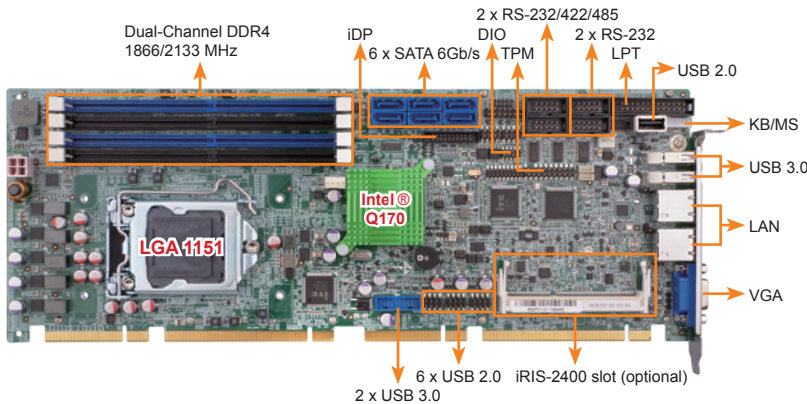

Four 288-pin DDR4 SDRAM Supported



RAID 0, 1, 5, 10 function compatible with six ports of SATA 6Gb/s

Specifications

- ◆ CPU
LGA 1151 Intel® Core™ i7/i5/i3/Pentium®/Celeron® processor supported
- ◆ Chipset
Intel® Q170
- ◆ Memory
Four 288-pin 2133/1867 MHz Dual-Channel DDR4 SDRAM unbuffered DIMM supported up to 64GB
- ◆ BIOS
UEFI BIOS
- ◆ Graphic Engine
Intel® HD Graphics Gen 9 supports DX11/12, OpenCL 2.x and OpenGL 4.3/4.4 Decode/Encode for HEVC, VP8, VP9, VDENC
- ◆ Display Output
Dual independent display
1 x VGA (up to 1920x1200@60 Hz)
1 x iDP interface for HDMI, LVDS, VGA, DVI and DisplayPort (up to 3840x2160@60 Hz)
- ◆ Ethernet
LAN1: Intel® I219LM Clarkville-V with Intel® AMT 11.0 supported
LAN2: Intel® I210 PCIe controller
- ◆ External I/O Interface
2 x USB 3.0
- ◆ Internal I/O Interface
1 x KB/MS (1x6 pin) 2 x RS-232/422/485 (2x5 pin, P=2.54)
1 x LPT (2x13 pin) 2 x USB 3.0 (2x10 pin)
1 x mSATA (SATA & USB signal) 6 x SATA 6Gb/s (RAID 0/1/5/10 supported)
1 x USB 2.0 (180° Type-A) 6 x USB 2.0 (2x4 pin, P=2.54)
2 x RS-232 (2x5pin, P=2.54)
- ◆ Front Panel
1 x Front Panel (1x10 pin, power LED, HDD LED, speaker, power button, reset button)
- ◆ LAN LED
2 x LAN LED (1x2 pin)
- ◆ Audio
Support 7.1 channel HD audio by I/EI AC-KIT-892HD kit
- ◆ TPM
1 x TPM (2x10 pin)
- ◆ SMBus
1 x SMBus (1x4 pin)
- ◆ I²C
1 x I²C (1x4 pin)
- ◆ iRIS Remote Management Module
1 x iRIS-2400 slot (optional)
- ◆ Expansion
16-lane PCIe link from CPU via golden finger:
Supports one PCIe x16, or two PCIe x8, or one PCIe x8 + two PCIe x4 on the backplane (configured via BIOS)
4-lane PCIe link from PCH via golden finger:
Supports four PCIe x1 slots or one PCIe x4 slot on the backplane (configured via BIOS switch)
1 x Full/Half-size PCIe mini card slot
Four PCI signal via golden finger
- ◆ Watchdog Timer
Software programmable support 1~255 sec. system reset
- ◆ Digital I/O
8-bit digital I/O (2x5 pin)
- ◆ Fan Connector
1 x CPU smart fan (1x4 pin)
1 x System smart fan (1x3 pin)
- ◆ Power Supply
5V/12V, AT/ATX support
- ◆ Power Consumption
5V@3.12A, 12V@6.85A, 3.3V@1.13A, 5VSB@0.15A
(Intel® Core™ i7-6700K 4.0GHz CPU with 64GB (16GB x 4) 2133 MHz DDR4 memory)
- ◆ Operating Temperature
-20°C ~ 60°C
- ◆ Operating Humidity
5% ~ 95%, non-condensing
- ◆ Dimensions: 338 mm x 126 mm
- ◆ Weight: GW: 1000g / NW: 420g



Features

- PICMG 1.3 full-size CPU Card
- LGA 1151 Intel® Core™ i7/i5/i3/Pentium®/Celeron® processor supported
- Four 288-pin DDR4 UDIMM 1867/2133MHz Dual-Channel supports up to 64GB
- Supports dual independent display by VGA & internal DP pin header
- Supports mini-PCIe device & mSATA via PCIe mini card slot
- Intel® PCIe GbE with Intel® AMT 11.0 supported
- Supports RAID 0, 1, 5, 10 function via SATA 6Gb/s
- TPM 1.2 & 2.0 hardware security function supported by TPM module

Packing List

| | |
|-------------------------------------|----------------|
| 1 x PCIE-Q170 single board computer | |
| 1 x SATA cable | 1 x QIG |
| 1 x Mini jumper pack | 1 x Utility CD |

Ordering Information

| Part No. | Description |
|---------------------|--|
| PCIE-Q170-R10 | Full-size PICMG 1.3 CPU Card supports LGA1151 Intel® Core™ i7/i5/i3/Pentium®/Celeron® CPU per Intel® Q170, DDR4, VGA/IDP, Dual Intel® PCIe GbE, USB 3.0, SATA 6Gb/s, PCIe mini, mSATA, HD Audio, iAMT and RoHS, Art. No. 150571 |
| PCIE-Q170-i2-R10** | Full-size PICMG 1.3 CPU Card supports LGA1151 Intel® Core™ i7/i5/i3/Pentium®/Celeron® CPU per Intel® Q170, DDR4, VGA/IDP, Dual Intel® PCIe GbE, USB 3.0, SATA 6Gb/s, PCIe mini, mSATA, HD Audio, iAMT, iRIS-2400 and RoHS |
| 19800-000049-RS | LPT flat cable, 240mm, P=2.54 |
| 19800-000075-RS | PS/2 KB/MS cable with bracket, 220mm, P=2.0 |
| 32102-000100-200-RS | SATA power cable, MOLEX 5264-4P to SATA15P |
| AC-KIT-892HD-R10 | 7.1 channel HD Audio kit with Realtek ALC892 support dual audio streams |
| CF-1150SA-R10 | Special cooler kit for LGA1150, High-performance compatible, 95W |
| CF-1150SB-R11 | Special cooler kit for LGA1150, High-performance compatible, 65W |
| CF-1150SC-R20 | Special cooler kit for LGA1150, 1U chassis compatible, 65W |
| CF-1150SE-R11 | Special cooler kit for LGA1150, high-performance compatible, 95W |
| CF-1150SF-R10 | Special cooler kit for LGA1150, 1U chassis compatible, 54W |
| DP-DP-R10 | DisplayPort to DisplayPort converter board (for iEi IDP connector) |
| DP-DVI-R10 | DisplayPort to DVI-D converter board (for iEi IDP connector) |
| DP-HDMI-R10 | DisplayPort to HDMI converter board (for iEi IDP connector) |
| DP-LVDS-R10 | DisplayPort to LVDS converter board (for iEi IDP connector) |
| DP-VGA-R10 | DisplayPort to VGA converter board (for iEi IDP connector) |
| SAIDE-KIT01-R10 | SATA to IDE/CF Converter board |

**By order production, MOQ: 100